

Model: TSTS-500


Deluxe Tree Seat

Accessory



WARNING

- This product is intended to be used at **GROUND LEVEL ONLY**. NEVER use this product in an elevated position.
- When hunting from any treestand, falls can occur at any time which can cause serious injury or death. **DO NOT** use this product without a **Full Body Harness (Fall Arrest System)** that meets current TMA standards. NEVER be detached from the tree for any reason or at any time. Read, Understand and Follow **ALL** instructions and warnings prior to each use.
- Do not return this product to the retailer. Call **BIG DOG TREESTANDS** for replacement of any damaged or missing parts.

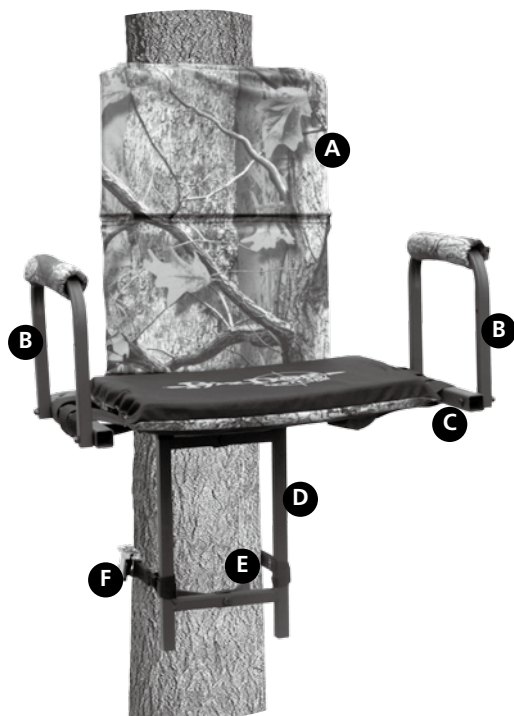

Please inspect the shipping carton for evidence of damage or that it may have been opened before you received it. Then inspect your product carefully. Compare it to the image on the product label and the picture illustration in your instructions. You must check and tighten all bolts before each use. If for any reason you are not satisfied with the product, do not use it until the problem is solved or corrected.

PACKING LIST:

A	1	Seat Cushion	Part # FSC-300
B	2	Arm Support	Part # AS-451
C	1	U-Support	Part # US-3000
D	1	H-Frame	Part # HF-500
E	2	Tree Connection Brace	Part # TB-200
F	2	Looped Ratchet Straps	Part # LR-200
	2	Armrest Foam Pads	Part # FP-451
	2	8mm x 2 - 1/8" Bolt	Part # 1516
	2	8mm x 1 - 3/8" Bolt	Part # 1512
	4	6mm x 2" Bolt	Part # 1015
	2	8mm Nylon Washer	part # 4010
	4	8mm Locknut	Part # 2510
	4	6mm Locknut	Part # 2010


ASSEMBLY INSTRUCTIONS

1. Bolt the (2) Tree Connection Braces **E** to the rear of the H-Frame cross bars **D** using (2) 8mm x 1-3/8" bolts and secure with (2) 8mm Locknuts.
2. Attach the U-Support **C** to the outside of the H-Frame **D** using (1) 8mm x 2-1/8" bolt and (1) 8mm Nylon washer between the H-Frame and U-Support and secure with (1) 8mm Locknut on each side. NOTE: The U-Support **C** has an additional tube welded to the bottom side which should be facing toward the ground when assembled.
3. Attach the (2) Arm Supports **B** to the outside of the U-Support **C** on both sides using (4) 6mm x 2" bolts and secure with (4) 6mm lock nuts. Note: Insure the holes near the bends in the Arm Support(s) are facing toward the FRONT of the Seat Assembly.
4. Check all bolts to insure all securely tightened.
5. Attach the Foam Pads to the arm supports. Refer to the seat buckle threading instruction, attach the Seat Cushion **A** to the U-support that is assembled with the padded arm supports. NOTE: Please test at the ground level to make sure you assemble the seat cushion correctly. This product is intended to be used at **GROUND LEVEL ONLY!!! NEVER** use at an elevated position.

INSTRUCTIONS FOR USE

1. Secure the ratchet straps around the cross bars in the H-Frame. Attach the looped strap ends to cross bars across from the ratchet mechanism and other side of the Tree Connection Brace. Repeat for the second cross brace in the H-Frame. See Stap Instructions.
2. Place Seat Assy against the tree. Wrap the top looped strap around the tree and insert the loose end through the ratchet mechanism and pull tight. Ratchet the ratchet lever until strap is tight against the tree. Repeat for the second ratchet strap. Always test before sitting on the Seat Assembly. While seated, insure feet are flat on the GROUND.


Seat Buckle Threading Instructions

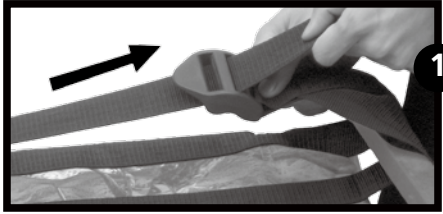

Insert strap end into back slot of the plastic buckle.




Loop strap over and insert strap end into second slot.

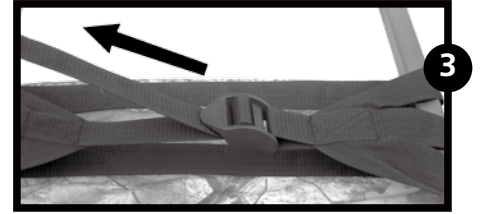


Pull the strap end firmly until the strap is tight against the Seat Frame. Tie-off the remaining strap end securely.


Strap Attachment/Threading Instructions

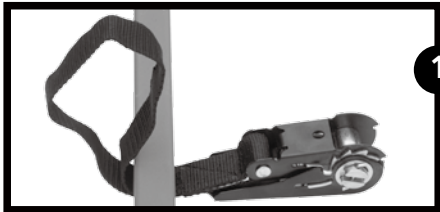

Wrap the sewn loop end of the ratchet mechanism around the tube.

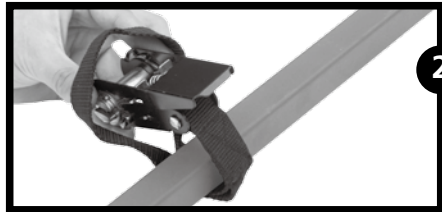


Spread the looped end open and pull the ratchet mechanism through the sewn loop.

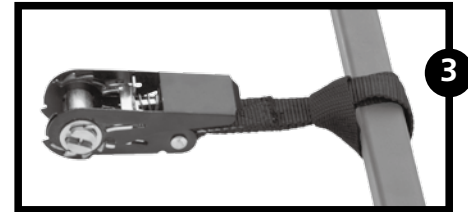


Pull the ratchet mechanism tight until the strap is tight around the tube.



Thread strap up through barrel as shown above.

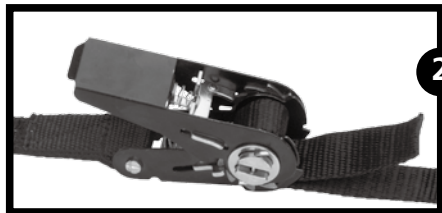

Pull strap tight, then ratchet lever to secure strap tight. Ratchet at least three(3) wraps around barrel.

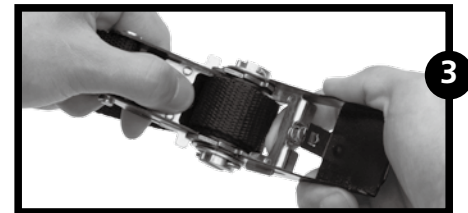

To release tension, push spring-loaded retaining lock and simultaneously pull strap.