

Model: BDTTK-100


Tripod Tower Kit

Tripod Accessory



WARNING

- When hunting from a treestand, falls can occur at any time which can cause injury or death.
- Insure ground under the Foot Plates of Tripod is firm and level. Inspect all parts/sections to insure all are secured and free of damage or wear before leaving the ground.
- Please do not return this product to the retailer. Call BIG DOG TREESTANDS toll free (1-866-387-2002) for quick replacement of any damaged or missing parts.

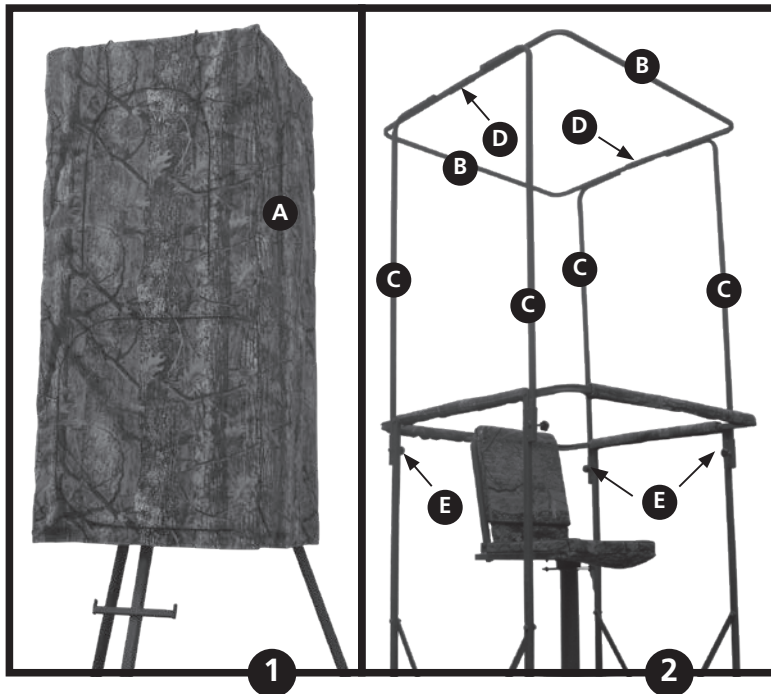

Please inspect the shipping carton for evidence of damage or that it may have been opened before you received it. Then inspect your product carefully. Compare it to the image on the product label and the picture illustration in your instructions. You must check and tighten all bolts before each use. If for any reason you are not satisfied with the product, do not use it until the problem is solved or corrected.

PACKING LIST:

A	1 Enclosure Cover	Part # TTKC-100
B	2 Top Frame Section	Part # TFS-100
C	4 Support Bar	Part # SF-100
D	2 Sleeve	Part# SC-100
E	4 6mm x 1 - 1/8" Cap Bolt	Part # 7025
	8 6mm x 1 - 5/8" Bolt	Part # 1013
	4 6mm x 1" Bolt	Part # 1010
	12 6mm Locknut	Part # 2010

ASSEMBLY INSTRUCTIONS

1. Note: Insure to install the cage assembly/cover at ground level. Refer to Tripod instructions and warnings for proper installation/procedures of raising/assembly of the unit prior to each use and installation of Tower Kit(s). Bolt (2) Top Frame Section(s) (Item B) together with (1) Sleeve (Item D) between the (2) frame sections using (4) 6mm x 1" bolts and locknuts. Tighten All bolts/locknuts securely. Note: Insure the locknuts are to the INSIDE of the assembly.
2. Bolt the (4) Support Bar(s) (Item C) to the OUTSIDE of the Top Frame Assembly using (2) 6mm x 1-5/8" bolts and (2) 6mm Locknuts on each Support Bar. Note: Insure that the locknuts are to the inside of the cage assembly.
3. Next, slide the cage assembly halfway out and tighten down the cap bolts onto the welded sleeve on shooting rail support tube. Next, slide the cover over the cage assembly till the zip area on top is flat. Rotate the fabric until the entry zipper is facing the entry steps into steps. Unzip front entry and roof section of the enclosure unit. NOTE: Insure the short welded tubes on the shooting rail support tubes are pointed away from the center of the platform area.
4. The enclosure unit can be adjusted full up position and fully down position if the top is unzipped. Insure to lock cage assembly with cap bolts at desired position.
5. Pull on the elastic cord at the bottom of the Enclosure Fabric until the fabric is tight around the platform base.

WARNING

- Insure ground under the Foot Plates of Tripod is firm and level. Inspect all parts/sections to insure all are secured and free of damage or wear before leaving the ground.
- Securely stake the foot plates of the tripod into the ground securely.