

Model: BDF-501

Stadium Fixed XL

FIXED POSITION TREESTAND


MAXIMUM WEIGHT LIMIT—300 POUNDS



WARNING

- When hunting from any treestand, falls can occur at any time which can cause serious injury or death. ALWAYS use a Fall Arrest System (FAS) at all times prior to leaving the ground. NEVER be detached from the tree for any reason or at any time.
- Please do not return this product to the retailer. Call BIG DOG TREESTANDS toll free (1-866-387-2002) for quick replacement of any damaged or missing parts.

Please inspect the shipping carton for evidence of damage or that it may have been opened before you received it. Then inspect your product carefully. Compare it to the image on the product label and the picture illustration in your instructions. You must check and tighten all bolts before each use. If for any reason you are not satisfied with the product, do not use it until the problem is solved or corrected.

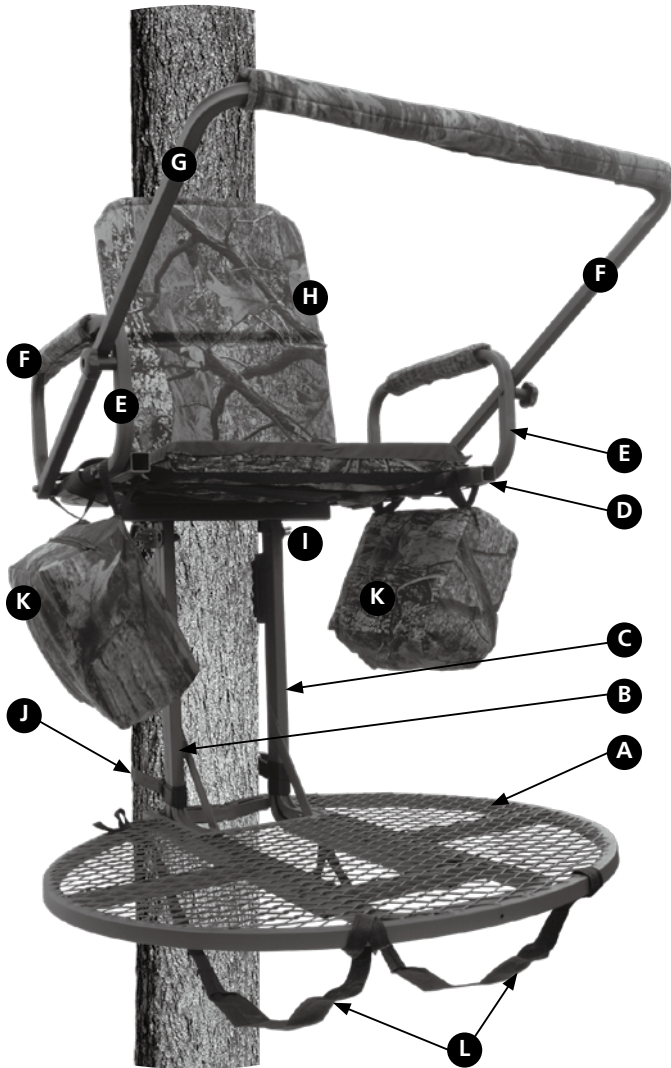

PACKING LIST:


A	1	Platform	Part # RP-500
B	1	Right Seat Support Tube	Part # LSS-500
C	1	Left Seat Support Tube	Part # RSS-500
D	1	U-Support	Part # US-300
E	2	Padded Arm Supports	Part # PAS-300
F	1	Right Padded Shooting Rail	Part # PSRR-300
G	1	Left Padded Shooting Rail(w/ Sleeve)	Part # PSRS-300
H	1	Seat Cushion	Part # FSC-300
I	1	Dbl. Claw Ratchet Strap (Upper)	Part # DCR-100
J	1	Looped Ratchet Strap (Lower)	Part # LR-200
K	2	Saddle Bags	Part # SB-100
L	2	Backpack Straps	Part # BS-500
	1	Full Body Full Arrest System(FAS)	Model # BDH-20015
	8	8mm x 2" Bolt	Part # 1515
	2	8mm x 1 - 3/8" Bolt	Part # 1512
	2	6mm x 3" Bolt	Part # 1020
	4	6mm x 2" Bolt	Part # 1015
	1	6mm x 1 - 1/8" Bolt	Part # 1011
	2	8mm Nylon Washer	part # 4010
	10	8mm Locknut	Part # 2510
	5	6mm Locknut	Part # 2010
	2	Thick Plastic Washer	Part # 4510
	2	6mm Long Quick Connector	Part # 7020
	2	Connection Tabs	Part # DCT-100

WARNING


- Always test/practice at ground level w/treestand and FAS until comfortable with safe use of the products.
- Proper threading/tightening/fastening/locating of all straps/cables is CRITICAL. Insure all straps/cables are properly threaded/tightened/fastened/located and are free of any damage/wear/weathering/deterioration prior to each use.
- Insure ALL contact points of the treestand/FAS are in contact/secured with the tree before stepping onto the platform and before leaving the ground.
- Always use a haul line to raise/lower treestand while attached to tree w/climbing belt or tether strap of the FAS.
- Always inspect the tree for any broken branches, nails, sharp bark, or any other obstructions that could cause ANY strap(s) to tear or become damaged prior to installing/using/removal of any treestand/ climbing aide/FAS and prior to leaving the ground. If ANY visible sign of damage or wear is present on any treestand/climbing aide/FAS, discontinue use and hunt from the ground.
- Replace ALL ratchet straps annually and ALL Hardware (bolts/nuts/cables) every (2) years. Use only Big Dog Treestands certified replacement parts/components, all others are viewed as a modification to the product. Frequently lubricate all hardware/parts or as needed. Never leave any treestand attached to the tree for more than (2) weeks due to tree growth. Inspect all expiration tags on all straps and FAS prior to each use.

ASSEMBLY INSTRUCTIONS

1. Place Platform (Item A) with the mesh facing down. (**Fig. 1**) Next, insert welded tree connection end of the Seat Support Tubes (Item B/C), through the opening near the "V" connection of the Platform. Note: The welded gusset should be facing TOWARD the center or each other of the platform. Secure using (3) 8mm x 2" bolts and (3) 8mm locknuts on each side. Note: Do not tighten any bolts until assembly is complete. (**Fig 1 & 2**)
2. Rotate the assembly so the Seat Support Tubes are pointed upward. Next attach the U-Support (Item D) to the outside, TOP holes in the Seat Support Tubes (Item B and Item C) using (2) 8mm x 2" bolts and secure with (2) 8mm locknuts with (1) 8mm Nylon Washer between the U-Support and Seat Support Tubes on each side. (**Fig. 2**) IMPORTANT: Insure the added welded tube on the U-Support is facing toward the Foot Platform. (**Fig. 2**) Next, attach (1) Connection Tab to each side of the Seat Support Tubes (just below U-Support) using (1) 8mm x 1-3/8" bolt and (1) 8mm Locknut. Note: Tab connection is located below the Seat Frame Assy.
3. Insert/connect the Left & Right sides of the Shooting Rail Assy (Item F & G) together using (1) 6mm x 1-1/8" bolt and (1) 6mm locknut. (**Fig. 2**)
4. Place the (2) Arm Supports (Item E) to the outside of the U-Support (Item D) secure the front hole of Arm Rest using (1) 6mm x 2" bolts and (1) 6mm locknut on each side. Note: Insure the single vertical hole in Arm Supports is facing toward the front of the Seat Assembly. (**Fig. 2**)
5. Insert (1) 6mm x 3" bolt from the inside rear hole of the U-Support, through rear hole of the Padded Arm Support, through (1) Thick Plastic Washer, and through the Shooting Rail Assy (Item F/G) and secure using (1) 6mm locknut on each side. Next, place (1) Long Quick Connector to the OUTSIDE of the Padded Arm Rest frame and secure with (1) 6mm x 2" bolt on each side. (Long Quick Connector is used as the rail stop location). (**Fig. 2**)
6. Tighten all bolts and lock-nuts to insure all securely tightened.
7. Attach the foam pads to the arm supports. Refer to the seat buckle threading instruction and attach the seat cushion to the U-Support that is assembled with the Padded Arm Supports. NOTE: Test/practice at the ground level with FAS.

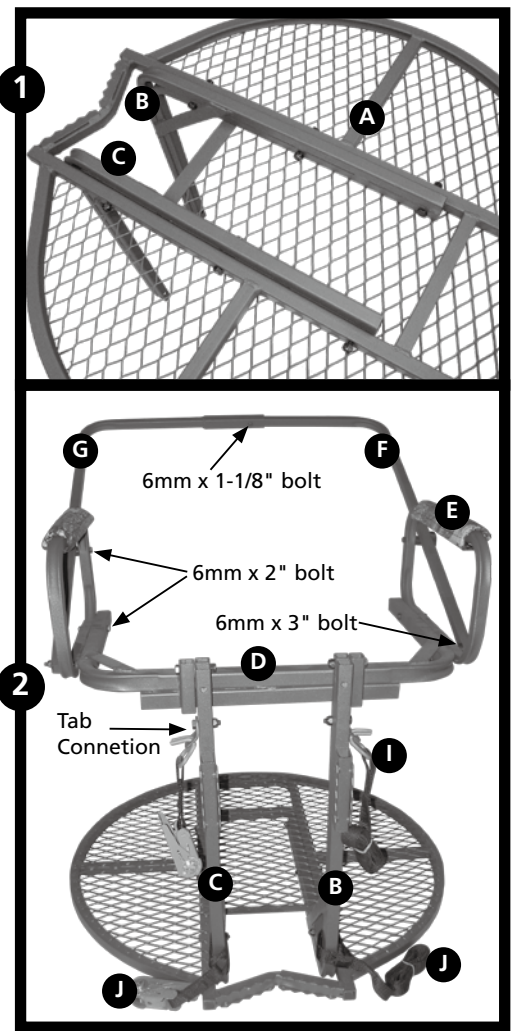

SEAT BUCKLE THREADING

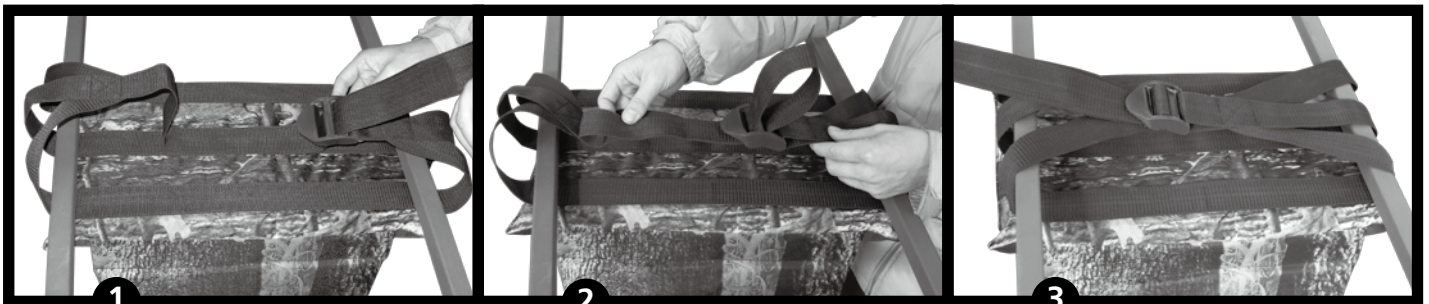


1. Insert strap end into back slot of the plastic buckle.


2. Loop strap over and insert strap end into second slot.

3. Pull strap end firmly until the strap end is tight against the Seat Frame. Tie-off remaining strap end securely.


BACKPACK STRAP BUCKLE THREADING INSTRUCTIONS

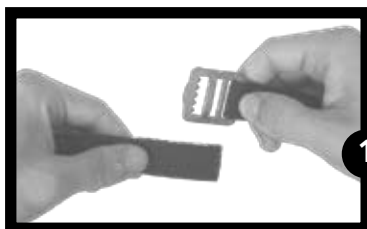

1. Hold the strap in one hand and the metal buckle in other hand.

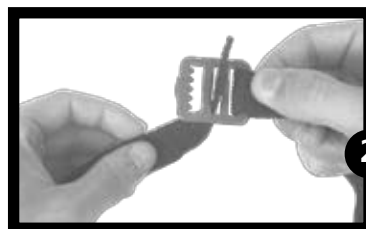

2. Push strap up through back slot, loop back over center bridge.

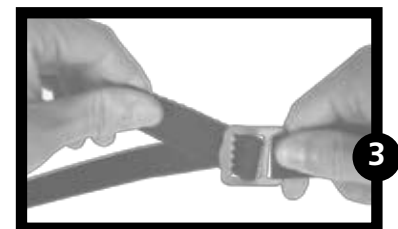

3. Slide the buckle down the strap so cleated end faces toward strap end. Wrap around tube, feed up through 2nd slot and down through cleated area and pull tight.

WARNING

- Inspect ALL straps and cables prior to EACH use. Do not use if any visible sign of damage/wear is present.
- Use of (2) or more capable adults is required to safely install/remove this product.
- DO NOT stand/sit on or lean against the seat or platform while securing/tightening/removing straps to/from the tree.

INSTRUCTIONS FOR USE


WARNING!! It is **REQUIRED** to **ALWAYS** use a Fall Arrest System and a climbing belt every-time when Using/Installing/Removing this product. The climbing belt of the Fall Arrest System is used as means of stabilization during ascent/decend/installation/removal of the treestand to/from the tree. The Fall Arrest System is **REQUIRED** to be used every-time before leaving the ground and at **NO** time should you be disconnected from the tree by means of the tether strap/climbing belt or both until safely back to the ground. **ALWAYS** practice with the treestand and Fall Arrest System at ground level until comfortable with use. **ALWAYS** Read/Understand all warnings/instructions and check straps/cables/treestand/FAS before each use and before getting onto the platform or leaving the ground. Please call if there are questions or concerns with the product/Fall Arrest System or warnings/instructions.

1. Insert one Double Claw ratchet mechanism hook end into Connection Tab mounted to the side of the Seat Support Tube just **BELOW** the Seat Frame Assembly. (**Fig. 2**) **IMPORTANT:** Insure the hook of the Double Claw Ratchet Strap is facing **OUTWARD** and **AWAY** from the tree and is inserted completely into the tab connection. Next, insert the Double Claw strap end into the opposite Connection Tab located on the opposite Seat Support Tube **BELOW** the Seat Frame Assy. Note: Insure the ratchet lever is facing outward to avoid interfering with the tree. Next, attach the Looped ratchet strap mechanism to the Seat Support Tube under the welded gusset located near the foot platform. Next, attach the looped strap end directly across from the looped ratchet strap mechanism. **NOTE:** It is **CRITICAL** all straps are attached/positioned correctly. Insure that none of the straps do not interfere with any moving parts. (**Fig. 2**)
2. While safely standing on your climbing aide attached to the tree with your climbing belt of your Fall Arrest System, carefully pull the treestand up to the desired height below the end of your climbing aide by use of a pull hoist or rope. [Important: It is advisable to use a hoist or hook system to hold the treestand in position until the treestand is secured to the tree safely and properly.] Next, wrap the **TOP** strap end around the tree and feed the strap end through the barrel of the ratchet mechanism and pull strap tight against the tree. Ratchet the lever until strap is tight against the tree and at least (3) wraps around the barrel of the ratchet mechanism. Repeat for bottom ratchet strap. Insure all contact points of treestand/FAS are in contact/secured to the tree at all times.
3. While attached to the tree with your climbing belt/tether strap/or both of the Fall Arrest System, step down onto the foot platform with one foot while keeping the other foot on the climbing aide and apply pressure. **ALWAYS** check all straps/FAS/bolts/contact points of treestand/FAS for damage/wear/weathering beofre each use and before getting onto the platform. Read/Understand/Review **ALL** product and Fall Arrest System instructions/warnings prior to each use.


INSTRUCTIONS FOR REMOVAL

1. Insure your Fall Arrest System is properly secured to the tree with tether strap/climbing belt/or both before leaving the ground and at all times during the removal/set-up of **ANY** treestand. Never be disconnected from the tree until safely back to the ground.
2. While attached to the tree with your Fall Arrest System and climbing belt, loosen and remove the **BOTTOM** strap first while safely standing on your climbing aide. **NOTE:** At **NO** time should you use the treestand/branches for any means of support or leverage during removal/set-up of any treestand.
3. Tie off a hoist line or rope to the treestand and then to the tree **BELOW** the foot platform and the contact points of the Fall Arrest System. Carefully loosen and remove the top strap while holding onto the hoist line/rope and carefully lower the stand down to the ground using a hoist line or rope. **NEVER** carry any treestand or anything on your back/side of your body that would interfere with safely climbing down the tree.

ATTACHING INSTRUCTIONS FOR LOOPING

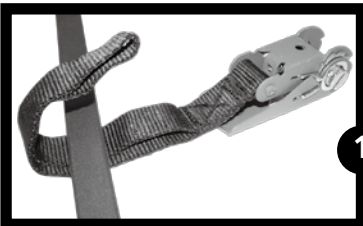

Wrap the sewn loop end of the ratchet mechanism around the tube.

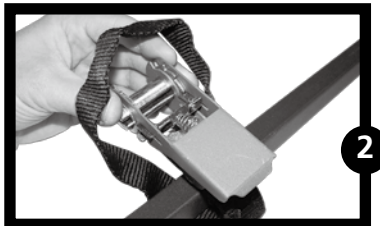


Spread the looped end open and pull the ratchet mechanism through the sewn loop.



Pull the ratchet mechanism tight until the strap is tight around the tube.


RATCHET STRAP THREADING INSTRUCTIONS

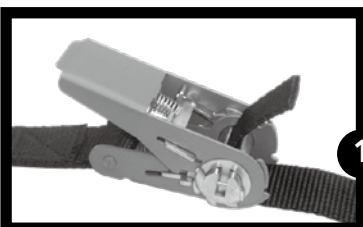

Thread strap up through barrel as illustrated above.



Pull strap tight, then ratchet lever to secure strap tight. Ratchet at least three(3) wraps around barrel.

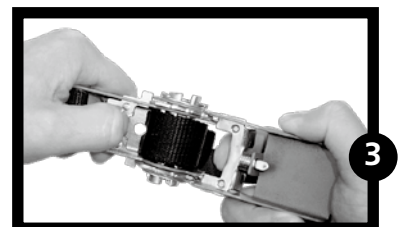

To release tension, push spring-loaded retaining lock and simulataneously pull strap.

SAFETY WARNINGS

Please Read/Understand ALL Safety Warnings prior to each use and always practice at ground level First!

ALWAYS

- Read and Understand ALL instructions and warning pages thoroughly before using your Fall Arrest System (FAS), treestand, ratchet/stabilizing straps/ropes and climbing devices prior to each use. Replace suspected or damaged components with only factory authorized parts and components. Discontinue use if any part of your product/FAS shows weathering or wear. ALWAYS inspect/check ALL expiration dates/tags on all straps/FAS prior to each use.
- Practice using the treestand and FAS at ground level until comfortable with safe/proper use of both products prior to each use.
- Insure that your Fall Arrest System (FAS), treestand, tree straps and climbing devices are in good working order without defects, wear, broken or missing parts before each use. This inspection includes the following prior to each use: Retightening all hardware, inspecting all components made of metallic and non-metallic items which includes straps/ropes/seats/FAS for excessive wear or damage before using any products.
- Always wear a Fall Arrest System properly attached to the tree from the time you leave the ground until the time you return to the ground. Keep the tether strap between you and the tree as short as possible to reduce the distance in case of a fall. Keep the linesman strap tight on the tree while you ascend or descend from the tree. The FAS tether must be tight while in a seated position.
- Practice your Recovery/Rescue/Relief plan with your (FAS) at ground level before using in an elevated position prior to each use.
- Step down into the center of the platform from your climbing aide while being attached to the tree with your FAS by either the tether strap or linemans strap. Position your fixed position stand below the end of your climbing aide to allow you to step down safely into the center of the platform.
- Store your Fall Arrest System (FAS), treestand, straps/ropes, complete set of instructions/warnings and climbing devices in a cool/dry location away from sun light, weathering, sharp objects or any type of wildlife. NOTE: Wildlife may chew on straps/seats while the stand is not in use and may cause serious damage. Check ALL straps and seats prior to each use. Review all warnings/instructions annually and prior to each use of the products.
- Hunt with a friend/partner to ensure that someone knows your hunting location as well as the time you are due to return home or to camp. Practice a safe recovery/rescue/relief plan with your FAS and treestand at ground level prior to each use.
- Before each use, insure that all ladder sections are secured/pinned together, all straps and ropes are free of damage or wear, ground beneath the ladder or foot pads is firm and level, adjustable support bar is attached and secured properly to the tree and the criss-cross ropes are secured properly before each use. Do not use if sections are separated or if there is any visible wear or damage present on treestand, straps, ropes or FAS.
- Take your time and move slowly at all times that while you are using, climbing to, or descending from your treestand. Use 3 Point Climbing Technique while ascending to or descending from this product while using your Fall Arrest System (FAS) at all times. Never lean backwards while climbing.
- Use (3) or more people to set-up or removal of any treestand unless instructed to have more people present. Use a min. 12" diameter straight/healthy tree on ALL treestands.
- Use a hoist line to pull fixed position stand(s) up to the positioning height below the end of the climbing aide while attached to the tree with climbing belt of your FAS.
- Understand the intended use for the treestand/FAS and adhere to all instructions/warnings which pertain to the safe use of Big Dog Treestands products.
- Have a cell phone, walkie-talkie, two-way radio, GPS locator or whistle on your person at all times for emergency purposes and ALWAYS inform someone of your hunting location and return time in the event of an emergency. Always practice/review your rescue/recover/relief plan prior to each use.
- There is time to make a correct decision on what action to take if a fall occurs while wearing a full body harness. It is important to remember, "DO NOT PANIC". Remain calm and implement your practiced rescue, relief and recovery plan.

NEVER

- Leave the ground without properly wearing your FAS harness and being properly attached to the tree from the time you leave the ground until you return to the ground. Failure to wear FAS or FAS not attached to the tree properly could result in serious injury or death. If FAS is not present, do not leave the ground. Single safety belts straps and chest harnesses ARE NO LONGER ALLOWED AND SHOULD NEVER BE USED.
- Climb with your weapon. Ensure that the firearm/bow is unloaded with its barrel pointed toward the ground when raising or lowering it to your stand. Always use a safe hoist/lift system on the opposite side of the tree from which you climbed while attached safely to the tree with your FAS.
- Climb with anything on your back/waist/or side that will restrict your movement or will interfere with safely using your FAS harness or treestand.
- Exceed the manufacturer's total weight limit for the product which includes your body weight plus the weight of your clothing/gear.
- Adjust ANY straps/ropes/adjustable support bars while standing on or leaning against any treestand nor use if any are not present or show damage or wear.
- Use this product if you are under the influence of alcohol, mind-altering drugs, prescription medicine, cold or flu medications, have heart problems or conditions, dizzy or have dizzy spells, sleepy or tired, afraid of heights, physically/mentally impaired to use product properly/safely, feeling ill, nauseous, if Fall Arrest System is not present, or if you have a prior medical condition that could cause a problem i.e. heart condition, joints that lock-up, spinal fusions, etc or if you are not well rested. Do not use any product without consent from your doctor for safe & proper use.
- Modify your stand in any way by repairs, replacing parts, or alternating or adding attachments to it except if explicitly authorized in writing by manufacturer.
- Replace parts/add attachments/adjust platform/make repairs unless the product is at GROUND LEVEL only.
- Exceed/modify the suggested manufactures hunting height for any product.
- Jump, bounce, lean-out from, lean against shooting rails or SLEEP in any treestand for any reason at any time.
- Leave any treestand attached to the tree more than (2) two weeks. Tree growth will stress the straps to the point of a possible failure that could result in serious bodily injury or death.
- Use any treestand during thunderstorm/raining/sleet/snow storms or any other adverse weather conditions that have the potential to produce lightning, high winds, or if snow/ice/water is present on the platform or climbing steps. If inclement conditions arise, end your hunt and return the ground.
- Use a tree stand for any purpose other than hunting. Do not use on utility poles or any other man made structures.
- Loan or let anyone use the treestand or FAS Harness without reading/understanding all product instructions/warnings of the product(s). If sold, a complete set of instructions/warnings must be given to purchaser. It is responsibility of the treestand/FAS owner to insure the borrower or buyer furnishes a complete set of instructions and safety warnings.
- Make any modifications/alterations to this product without written consent. Any/All modifications/alterations will void all warranties and relieve Big Dog Treestands Inc. from all liabilities.
- Climb/Use a tree that is diseased, dead, under sized, leaning, has dead/broken branches/loose bark.
- Stand on the seat/footrest/shooting rail/armrest or rely on any branches for support or means of securing or standing.

WARNING

- Failure to Read/Understand ALL Warnings and Instructions stated could result in serious bodily injury or death. Use of an approved FAS is required to be used at all times when hunting from an elevated position.
- You must replace ALL straps (ratchet, button, stabilizing straps/ropes, etc) and suspension seats EVERY year. Use only Big Dog replacement straps and parts. Any other straps or parts will be viewed as a modification to the product. Any modification will void the warranties and relieve Big Dog Treestands Inc. from all liabilities.
- ALWAYS inspect treestand/straps/cables/FAS/ if ladder sections are pinned together/ground beneath the ladder stand is firm and level/adjustable support bar is connected to the tree properly prior to each use. Do not use if ANY physical/visible damage/wear is suspected or present.
- It is recommended that you oil/lubricate ALL hardware as needed or at least annually. It is recommended that you replace all hardware/cables/nuts/bolts/clips on your tree stand every two years or sooner if inspection finds it necessary.
- Failure to use a Fall Arrest System (FAS) at ALL times could result in serious bodily injury or death.
- Insure ALL contact points of the treestands and FAS are in contact with the tree and are secured properly before climbing onto the platform or leaving the ground.
- Proper threading/tightening/fastening/location of all straps/cables are CRITICAL. Insure all straps/cables are properly attached/fastened/secured/loacted on the tree and are free of damage/wear/ weathering/deterioration prior to each use.
- Inspect all expiration tags on all straps and FAS prior to each use. Replace all straps annually. Replace all hardware every (2) years. Use only Big Dog Treestands certified replacement parts, all other are viewed as a modification to the product. Never use any strap(s) or FAS that has expired or showing any damage or wear.
- Always use a haul line while attached to the tree with your FAS by means of the linemans strap/ climbing belt to pull up or take down all fixed position stands.
- Insure all Tripods and Quadpods are properly staked to the ground to prevent movement in the unit in high winds. Note: It is advisable to have a certified electrician ground these unit(s) to the ground in the event of being struck by lightning.