

Model: 175-8810

Ladder & Treestand Roof Kit


Treestand Accessory

Timber Strike®

TREESTANDS

WARNING



- When hunting from any treestand, falls can occur at any time which can cause serious injury or death. ALWAYS use a Fall Arrest System (FAS) at all times prior to leaving the ground. NEVER be detached from the tree for any reason or at any time.
- Please do not return this product to the Menards. Call BIG DOG TREESTANDS toll free (1-866-387-2002) for quick replacement of any damaged or missing parts.

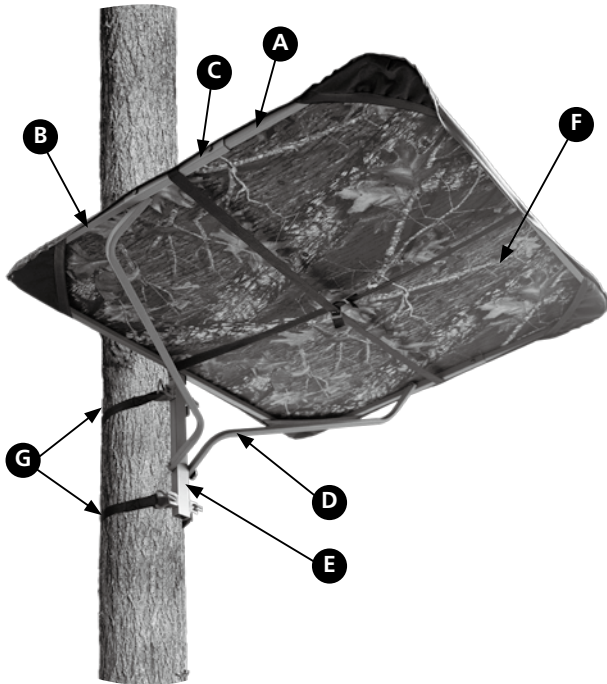

Please inspect the shipping carton for evidence of damage or that it may have been opened before you received it. Then inspect your product carefully. Compare it to the image on the product label and the picture illustration in your instructions. You must check and tighten all bolts before each use. If for any reason you are not satisfied with the product, do not use it until the problem is solved or corrected.

PACKING LIST:

A	1	Front Rail Section	Part # FRS-040
B	1	Rear Rail Section	Part # RRS-040
C	2	Sleeve	Part # S-040
D	2	Rail Support Brace	Part # RRB-040
E	1	Tree Brace Support	Part # TBS-040
F	1	Fabric Cover	Part # FC-040
G	2	Double Claw Stabilizing Strap	Part # DCB-150
	1	6mm x 2 - 1/8" Bolt	Part # 1016
	2	6mm x 1 - 3/4" Bolt	Part # 1014
	2	6mm x 1" Bolt	Part # 1010
	5	6mm Locknut	Part # 2010
	1	6mm Wing Nut	Part # 5625
	1	6mm x 3 - 1/4" Cap Bolt	Part # 7030

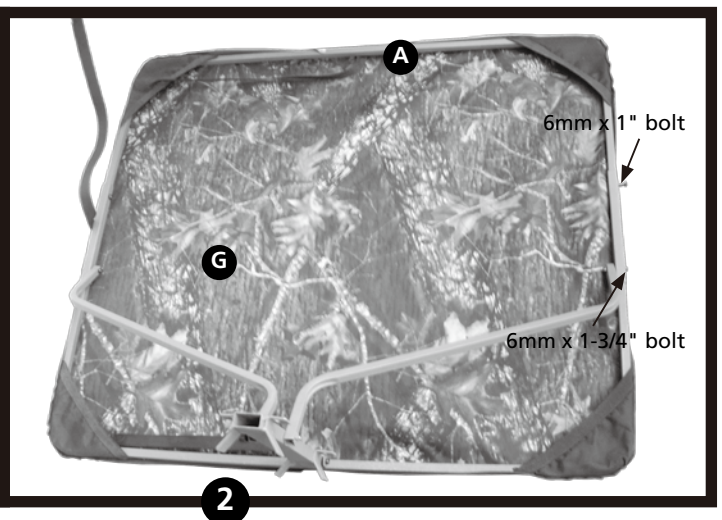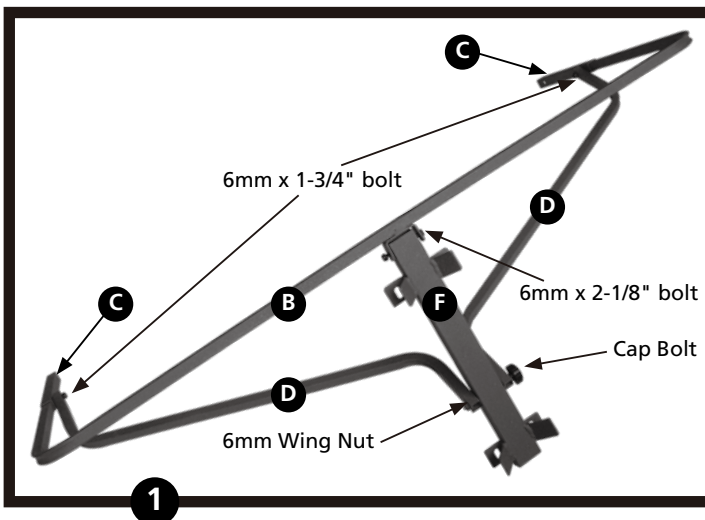

WARNING

- Proper threading of straps is critical. Insure all straps are properly threaded and free of damage/wear prior to each use.
- Replace ALL straps (ratchet/button/stabilizing) annually and ALL Hardware (bolts/nuts/cables) every (2) years. Use only Big Dog Treestands certified replacement parts/components, all others are viewed as a modification to the product. Frequently lubricate all hardware/parts or as needed.
- Use of a haul line is REQUIRED to pull the unit up the the desired height.
- Always test/practice at ground level w/treestand and FAS until comfortable with use of the product.

Thank you for purchasing the Roof Kit. This instruction will tell you how to assemble and use the product. Every year hunters are seriously injured in tree stand accidents. Please carefully read and follow these instructions. For missing or damaged parts, please visit our web site or call customer service for fast service.

ASSEMBLY INSTRUCTIONS


1. Bolt the U-Bracket on the Rear Rail Section (Item B) (located near center) to the Tree Brace Support (Item E) using (1) 6mm x 2-1/8" bolt and locknut. Note: U-Bracket fits to the top and outside of the Tree Brace Support. Tighten securely. **(Fig. 1)**
2. Bolt the (2) Sleeves (Item C) onto the each end of Front Rail Section (Item A) using (2) 6mm x 1" bolts and (2) 6mm locknuts. Next, layout out the Roof Fabric (Item F) flat onto a table or bench with the camo side facing up. Insert the Front Rail section into the corner pockets of the Roof Fabric. Next, Insert the Rear Rail Section into the Sleeve(s) until Rear Rail Section bottom out against the Front Rail Section inside the Sleeve(s). Insert the Rear Rail Section into the rear pockets of the Roof Fabric. Slide the two sections apart until the hole(s) are aligned with the Rear Rail Section and the Sleeve(s). Insert (1) 6mm x 1-3/4" bolt through on each side. Note: The locknut is not added until the next step. Note: The camo side will be facing toward the ground when attached to the tree. **(Fig. 1)** Insert Rail Support Braces (Item D) to the open bolts on the INSIDE of Rear Rail Section and Sleeve connection and secure with (1) locknut on each side. Note: The ends of the Support brace should be touching the body of the Tree Support Brace. [Wrap tape around all bolt connections to prevent ripping of the fabric] **(Fig. 2)**
3. Insert (1) 6mm 3-1/4" Cap Bolt through the both Rail Support Brace(s) and Tree Brace Support and secure all 3 components with (1) 6mm Wing Nut. Next, secure the cross straps across the Roof Fabric. See strap instructions for proper buckling of cross straps.
4. Tighten all bolts securely and refer to the buckle threading instruction to fasten straps on roof fabric securely.

INSTRUCTIONS FOR USE


1. Attach the tree brace support to the tree at the designed height with two double claw stabilizing straps. Pull the strap tight until the strap is tight and the tree stand cover is secure to the tree. Refer to the stabilizing strap buckle threading instruction for proper threading. Please refer to threading instructions, assembly illustrations, and product diagram for correct locations/orientation of ALL straps/ropes, adj. support bar, and positioning of stand. Please call if any questions/concerns on product use.

STRAP INSTRUCTIONS

STABILIZING STRAP BUCKLE THREADING INSTRUCTIONS

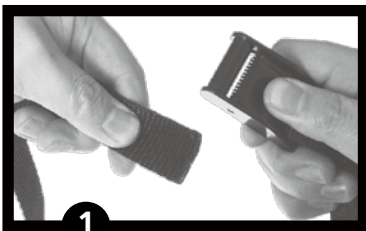

1
Push button down and thread strap up through bottom of cam buckle

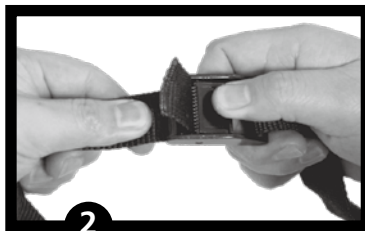


2
Check strap by pulling downward to make sure strap is tightly secured.




3
Pull tight and release the cam buckle. Make sure it's secured.


ROOF FABRIC BUCKLE THREADING INSTRUCTIONS

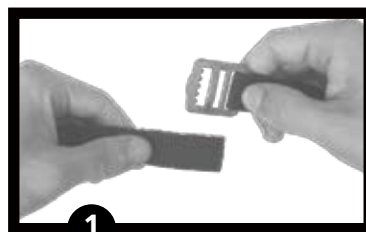

1
Hold the strap in one hand and the metal buckle in other hand.

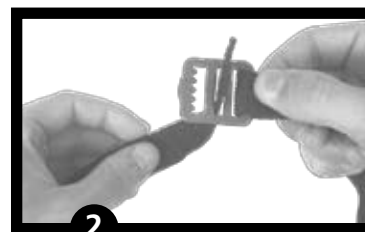

2
Push strap up through back slot, loop back over center bridge.

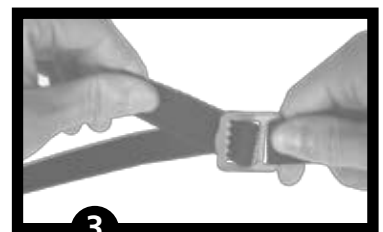

3
Back through toothed slot and adjust strap till fabric cover is snug against rail sections

WARNING

- Insure ALL contact points of the treestand/FAS are in contact/secured with the tree before climbing onto the platform.
- DO NOT leave this unit in the up position when not in use or where high winds, rain, snow, or ice storms are possible. Always remove or lower this roof when not in use and secure the roof firmly against the tree.
- Use of a FAS is REQUIRED when using/installing/removing of this product.